



ALL-ALUMINUM

Installation Guide

INSTALLATION VIDEOS




leafblasterpro.com/all-aluminum-install-guide

NEED HELP?

customerservice@gutterglove.com | 866.483.8166 | M-F 8am-7pm CST

In Your Kit

Gutter Guard (Also referred to as Guard)

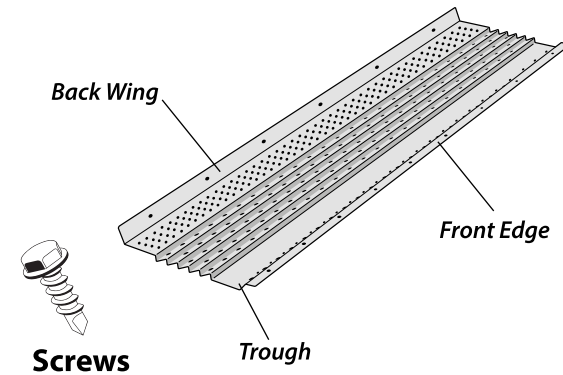

Recommended Tools



Safety Is Our #1 Priority.

During installation we recommend that you...


- Wear gloves and safety glasses.
- Use an extension ladder and standoff for stability.
- Make all cuts to the gutter guards on the ground.

ALSO MAKE SURE TO:

- Obey local building codes.
- Check to see if your roofing material is adhered to your underlayment. Do not pry up your shingles or tear your underlayment.
- Remove any labels/stickers from the gutter guard piece as needed.

! Important Reminder


Missing this step can result in **rainwater runoff**.

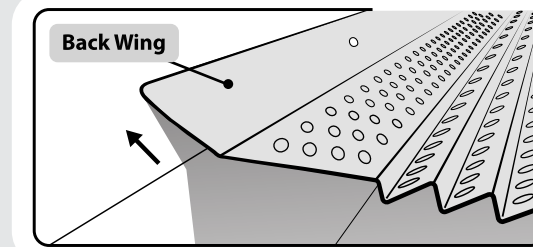


Back wing should face **up** for proper installation.

Start Here

1 Clean Out & Repair Gutters

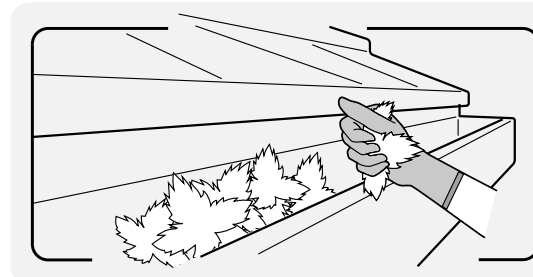


2 Measure & Cut the Guard as Needed

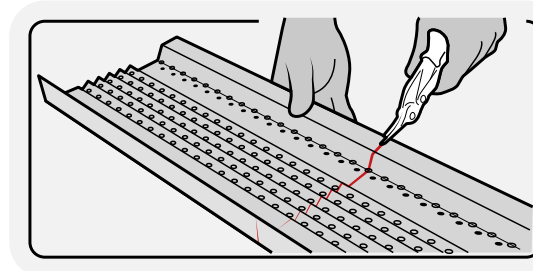

Use a new, or freshly sharpened pair of tin snips or a Dremel to make any cuts to the guard. For safety, use protective gloves and make cuts while on the ground.


3 Start Laying the First Piece

We recommend starting at the end of the gutter.

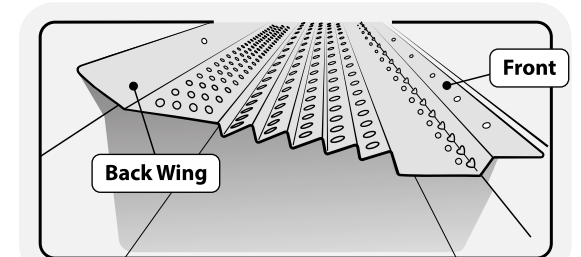

Place the guard on the gutter with the front edge resting on the front lip of the gutter. The rear of the guard should sit just above the back of the gutter (resting on the gutter hangers) with a gradual slope downward.

4 Securing the Guard

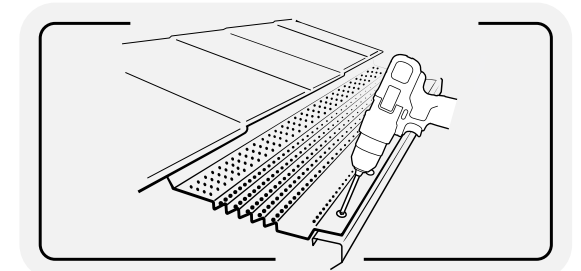


Using three of the provided screws per section, secure the front of the guard to the front lip of the gutter – place one screw at each end and one in the center.


For additional strength, secure the back wing of the guard to the fascia of the home using 2-3 screws. *Note: 1 inch screws may be necessary here if you have difficulty securing with the provided 1/2 inch screws.*

5 Continue Installing Next Piece

The guards were designed for the sections to overlap.

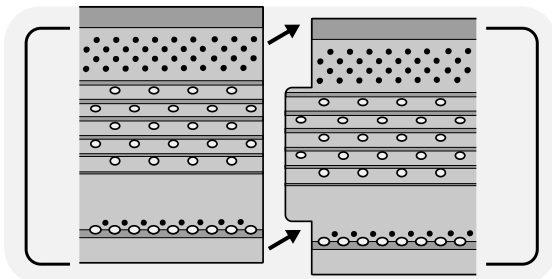


When joining sections, simply overlap the end of one section over the notched end of the adjoining section until they abut. The drain holes will align when the two sections are joined properly.

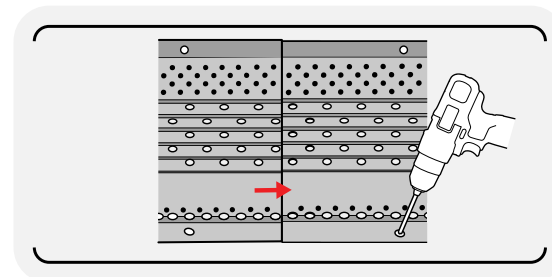


Note: All-Aluminum gutter guards are made available in factory finished paint colors and in a mill finish. Modifications made to any materials or components, including painting, **WILL VOID** the manufacturer's warranty and may negatively impact the drainage performance of the gutter guard.


HOW-TO Inside Corners



Trim the front edge of Piece A as shown in Image 1. Use the larger, front row of drain holes in the trough as a cut line. This will allow Piece B to fit properly atop Piece A.



Cut the end of Piece B at 45 degrees. Next, make a 1/2 inch straight cut to the back wing. Place piece B atop piece A and check that the alignment has no gapping.




A completed inside corner should look like Image 3. Piece B should rest atop Piece A creating a seamless miter. For a tighter seal, place a screw through Piece B into Piece A to pull the pieces together.


Installing a splash shield on inside corners can help disperse the water.

Note: The drainage holes will not align where the miter sections overlap. This is normal, and water will still drain into the gutter.


HOW-TO Outside Corners



Cut the end of Piece A at 45-degrees. Next, cut a 1/2 inch wide notch from the back wing. Then, trim off 3/4 to 1 inch from the front edge in a straight line.




Cut the end of adjoining Piece B at 45-degrees. Repeat the 1/2 inch wide notch cut on the back wing and the 3/4 to 1 inch trim from the front edge. Pieces A & B should slightly overlap.



A completed outside corner should look like Image 3. For a tighter seal, place a screw through Piece B into Piece A to pull the pieces together.

PRO TIP Cutting Miters

The small drain holes at the rear of the guard are on a 45 degree angle. Use them as a guide to cut a perfect miter.

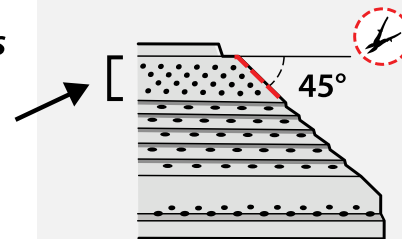

! Important Reminder

FREEZING CONDITIONS

If you live in an area that is prone to freezing, the following issues can occur with any gutter guard:

Icicles & Ice Dams

Icicles and ice dams may form on your gutter during freezing conditions. Ice dams can cause water to leak back into your home. Icicles can break and cause serious bodily harm and injury. Properly installed, operated and maintained heating elements on your roof and gutter can melt icicles and ice dams. Use a local licensed electrical contractor in good standing for installing any heating element products.

Snow Melting

Snow melt may result in water runoff from your roof which can refreeze on the ground below creating a potential slipping hazard.



COMPLETING THE JOB

- 1 Clean up the jobsite.
- 2 Ask for a great review and a referral!
- 3 SHARE YOUR GOOD WORK!

Submit your project or invoice for rewards in the LeafBlaster Pro Contractor Loyalty Program!

JOIN NOW!

LeafBlasterPro.com/Join-Loyalty